



For wire collated
BDC nails

CE

BeA Pneumatic Nailer DC/80-802C

For nails of 2,5 - 3,1 mm in the lengths of 50 - 80 mm

- Extremely powerful and sturdy
- 360° adjustable exhaust
- Integrated sound absorption
- Ergonomic handgrip, insulated against cold
- Reinforced head piece
- Thread for hanger
- Dust and dirt protection

Applications

Production of pallets, crates and wooden boxes, packings for heavy load, prefabricated house construction, carpentry, roof boardings, interior fittings



BeA DC/80-802C

Technical Data




Article no.	12100670
EAN Code	4045759061403
Magazine type	Top loader
Safety system	Contact actuation
Fastener type	Nails type BDC
Magazine capacity	Max. 300 nails
Operating pressure	5 - 8 bar
Max. operating pressure	8 bar
Air consumption / operation	2-3 litres / 6 bar
Inner hose diameter	Ø 9 mm recommended
Measurements, mm	L 332, H 362, W 130
Weight	3,75 kg
Emission sound pressure level at the workstation	94 dB
Single shot emission sound pressure level	103 dB
Vibration level as per ISO 8662-1 1 is 4,3 m/s ² .	
Accessories	Operating instructions, spare parts list, service instructions, allen wrench

Coil nails BDC

BDC-Nägel = wire welded coil nails

Length	50 - 80 mm
Diameter	2,5 - 3,1 mm

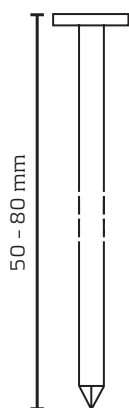

Material	BK = steel, bright
	NK = steel, electro galvanized
	RF = stainless steel, comparable with material 1.4301
	NR = stainless steel, comparable with material 1.4401
	FV = steel, hot dipped galvanized
Surface properties	Smooth
	Ring shank
	Screw shank
Head type	Flat head
	Dome head
	PZ head
	TX head

Further types available on request, nails conform to DIN 1052 as well as EN 14592 (Eurocode 5)

Joh. Friedrich Behrens AG
Industrielle Befestigungssysteme
Bogenstraße 43 - 45
22926 Ahrensburg
Germany

Further information:
Tel: + 49(0) 41 02 78 - 444
Fax + 49 (0) 41 02 78 - 270
info@behrens-group.com
www.bea-group.com

BeA is a member of the following trade associations:

